




ALUMINUM COIL & SHEET




Aluminum Coil & Sheet

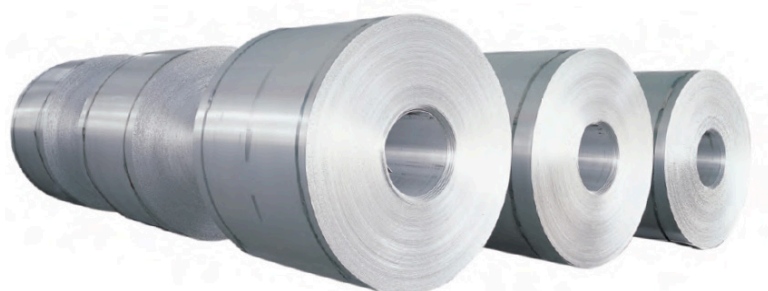


COLD ROLLED COIL



PRE-PAINTED COIL

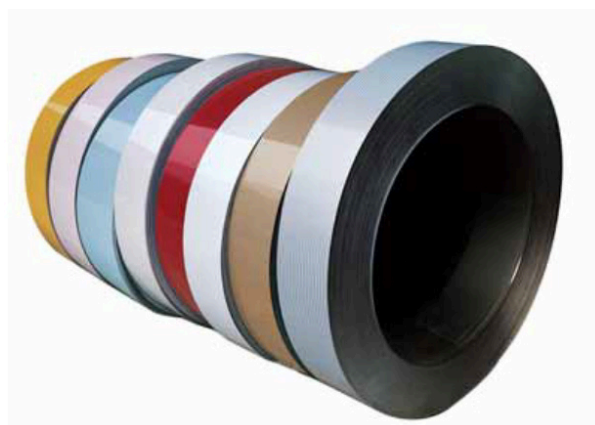

PRE-PAINTED COIL

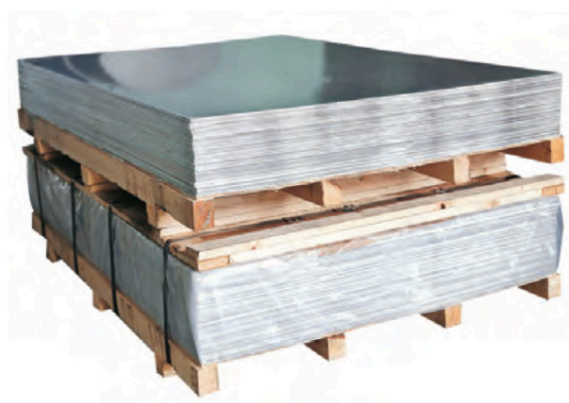

COLD ROLLED SHEET

SPECIFICATIONS

Product	Alloy	Temper	Thickness (mm)	Width (mm)	Length (mm)	Technical Standard
Aluminum Sheet	1050,1060,1100, 1200,3003,3105, 8011	O, H ₁₈ , H ₂₄ , H ₂₆ ,H ₁₄ , H ₁₆	0.16 - 4.0	1350 max	1000 - 4000	GB/T3880-1997
Aluminum Coil	1050,1060,1100, 1200,3003,3105, 8011	O, H ₁₈ , H ₂₄ , H ₂₆ ,H ₁₄ , H ₁₆	0.16 - 4.0	1350 max	<u>Coil Inner Diameter</u> Φ : 505 <u>Coil Outer Diameter</u> Φ : 1100 Recommended Φ : 1700 Max	GB/8544-1997

Aluminum Sheet

DESCRIPTION

This aluminum sheet is designed for industrial and construction use. It can be customized in different sizes, thicknesses, styles, finishes, and different acoustic insulations to meet specific requirements and standards.

SPECIFICATIONS

Typical Size (ft): 1x1, 1x2, 1x4, 2x2, 2x4, 4x4, 4x8.



Thickness: 6-34 gauge, 0.006-0.157in (Mill Finish).

18-27 gauge, 0.014-0.039in (Pre-Painted).

Style: Plain or Perforated.

Finish: Mill Finish, Pre-Painted, PVDF.

Acoustic Insulation: Normal Non-Woven, Acouloc Non-Woven, Soundtex Non-Woven, or None.

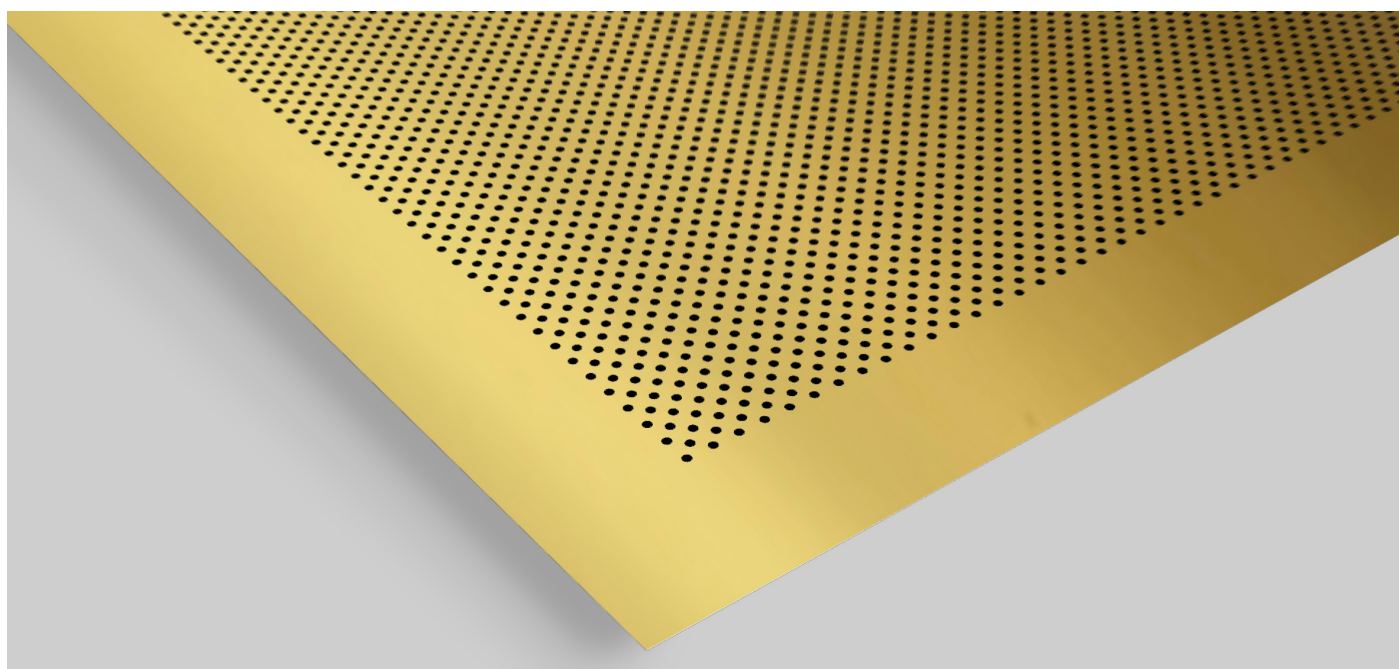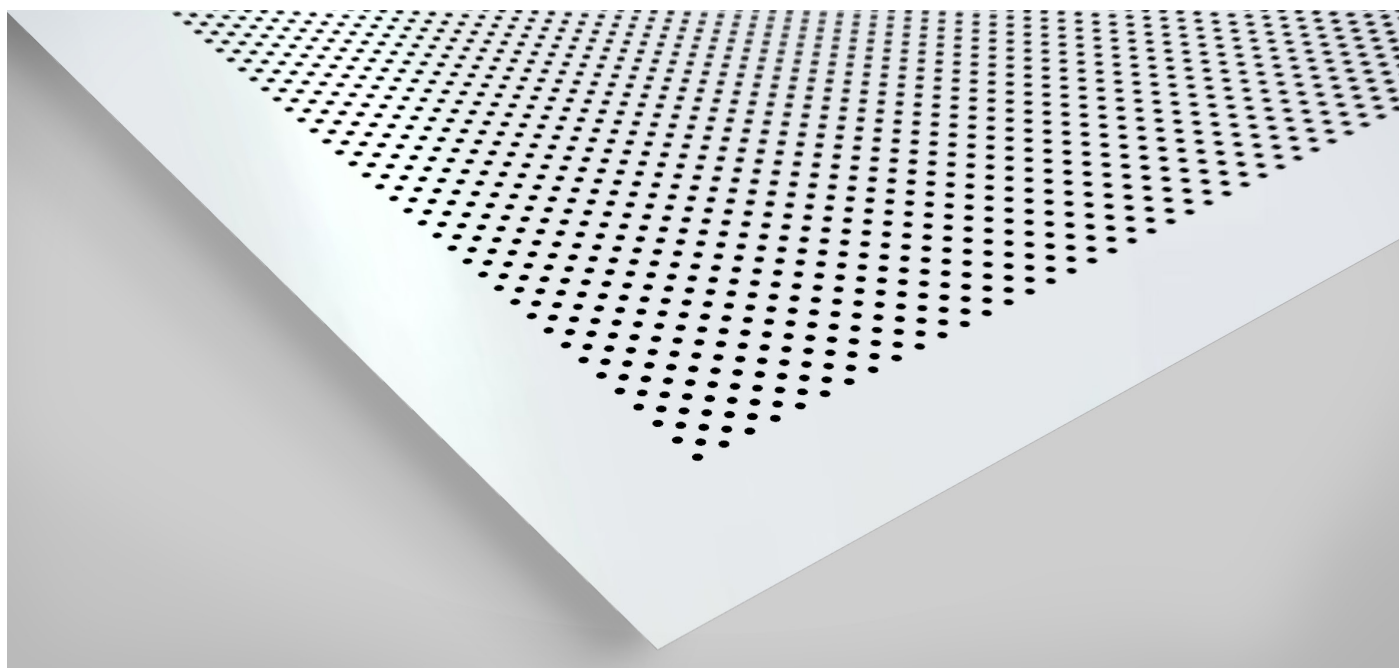

Notice: Data are approximated into in/ft/gauge. See the SI unit catalog for exact measurement. Talent Building Material, Inc. assumes no responsibility for any errors that may inadvertently appear in this document.